



UNCOMPRIMISING IN EVERY SENSE™



## RWC7SI

7" STEREO INPUT REAR WAVE CONTROL LOUDSPEAKER



High Performance Ceiling-Mount Loudspeaker that reproduces stereo sound from a single loudspeaker; optimal for spaces where multiple speakers are not practical. Glass fiber woofer cones with dual voice coils and dual UltraSilk® soft dome tweeters on a stereo imaging array create spacious stereo sound from a single speaker.

### KEY FEATURES

- **Designer Aesthetics** Magnetically attached MicroThin™ round speaker grilles ensure a clean, virtually invisible designer appearance that blends with the room's aesthetics. Optional square grilles provide even more design flexibility.
- **Audiophile Performance** Premium components, high-level crossovers, and a rigid, cast metal bridge combine to provide exceptional sonic performance; the custom-tuned, integrated Rear Wave Control Enclosure ensures consistent, predictable sound while significantly reducing unwanted sound from bleeding into adjacent rooms and spaces.
- **Directed Soundfield™** This patented technology directs the sound to the listening area to ensure the best sound quality. A new patent-pending pivot mechanism rotates smoothly and holds the assembly securely in place.
- **Installation Ease** Patented-pending spring-tensioned mounting clamps install quickly and compensate for uneven mounting surfaces and varied environmental conditions. The unique shape of the custom-tuned integrated Rear Wave Control Enclosure enables it to be easily tucked through the loudspeaker's hole cutout—perfect for retrofit installations.
- **Install With Confidence** The best-built loudspeakers deserve the best protection—a Lifetime Limited Warranty.

# RWC7SI

## 7" STEREO INPUT REAR WAVE CONTROL LOUDSPEAKER



### RWC7SI

7" STEREO INPUT LOUDSPEAKER  
FG01627


Packaged Individually with Round MicroThin™ Grille

#### RELATED PRODUCTS

SG7C 7" Magnetically Attached  
Square MicroThin™ Speaker Grille  
FG01645



NCB7C 7" New  
Construction Bracket  
FG01647

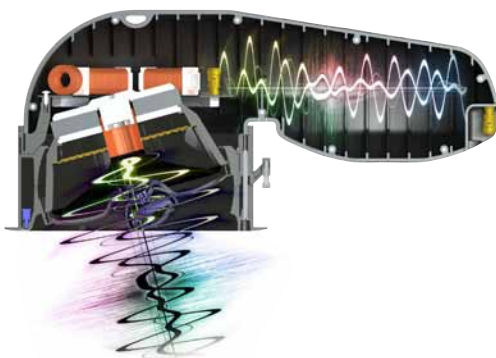

#### Rear Wave Control Enclosure Sound Isolation\*

50 - 500 Hz	-16dB
500 - 2,000 Hz	-37dB
2,000 - 20,000 Hz	-25dB

\*In typical installations.

### FEATURES

- 7" black glass fiber dual voice coil woofer reproduces both the left and right channels
- Dual 1" UltraSilk® soft dome tweeters provide extended frequency response
- Rigid, cast metal tweeter bridge stiffens the structure for improved clarity
- Bridge-mounted stereo imaging (SI) tweeter array directs the high frequency sounds from the left and right channels at opposing angles
- Custom-tuned, integrated Rear Wave Enclosure provides consistent, repeatable performance while reducing sound from bleeding into adjacent spaces; unique design enables it to be retrofitted into existing construction
- Patented Directed Soundfield™ technology directs the sound to the listening area to ensure the best possible listening experience
- Patent-pending woofer pivot mechanism adjusts smoothly and holds the assembly securely in position
- Asymmetric 2nd order 2-way computer optimized Linkwitz Riley crossover
- Rust-resistant, magnetically attached grilles
- Weather-resistant construction enable installation in moist areas such as bathrooms and outdoors under eaves

### SPECIFICATIONS

- Recommended amplifier power: 10 - 140 watts
- Impedance: 8 ohm nominal; 6 ohm minimum
- Frequency response: 52 Hz to 21 kHz +/-3 dB


### DIMENSIONS

- Frame dimensions (with grille): 9-7/8" (25.15 cm) diameter
- Hole cutout dimensions: 8-1/2" (21.60 cm) diameter
- Depth behind ceiling (5/8" drywall): 7-1/8" (18.08 cm)

### WARRANTY

- Lifetime Limited

\*US Patent 6,070,694  
Additional Patents Pending in the US and other countries

ENGINEERED BY  NILES®

©2010 Niles Audio Corporation. All Rights Reserved. Niles, the Niles logo and Blending High Fidelity and Architecture are registered trademarks of Niles Audio Corporation. All other trademarks are the property of their respective owners. CS0306A